


Wall air intake OPTI-PM

The wall shutter provides a discreet and aesthetic air intake. It is available to meet the various needs. The wall shutter is generally used to help ventilate agricultural, industrial buildings as well as home facilities.



Advantages

- Can be used as a air exhaust or air intake.
- The configuration prevents water or snow from seeping in
- Built-in retention pan
- Reinforced grid preventing rodent entry

Colours

Standard colours available: brown, grey, black, white. Other colours available on special order (additional fee).

Norms


In compliance with CSA

Use

The wall shutter can be used as air intake as well as air exhaust.

Characteristics

The vent is manufactured from galvanized steel followed by a specialized baked paint finish.

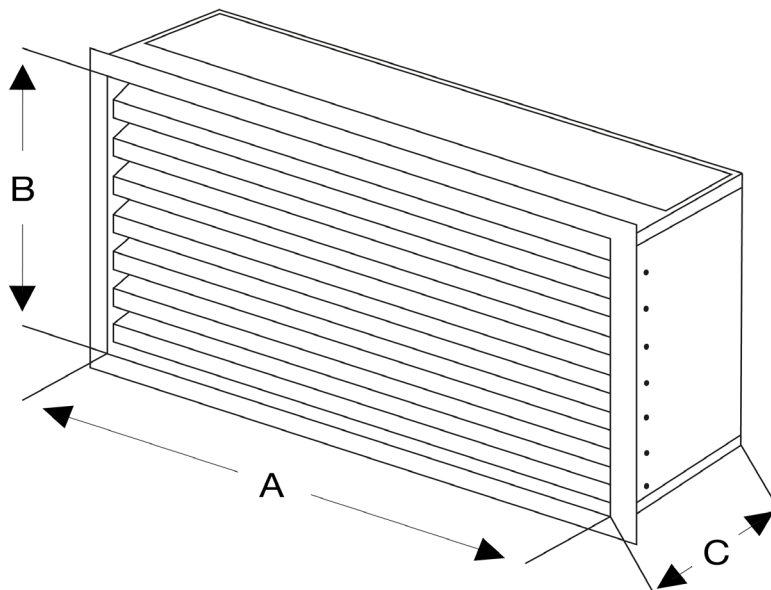

PRODUCT	DIMENSIONS			STEEL GAUGE USED
	A	B	C	
OPTI-PM	60,9 cm • 24"	30,4 cm • 12"	16,2 cm • 6,375"	24 & 26
	91,4 cm • 36"	60,9 cm • 24"	16,2 cm • 6,375"	

Custom model

These products are available by special order only. *We can manufacture any other size upon request.

Options

The evacuation window can be positioned on top of the wall shutter or at the back upon request.

Warranty

The consumer must ensure that this product is appropriate for the intended use. Since the installer's skills and surface conditions are independent of the manufacturer's control, we limit our liability to the replacement of defective equipment only if proof of purchase can be provided. Free on board (FOB factory).