

Multi-exit insulated vent with insulated base for flat roof (suitable for membranes) OPTI-ViM112

Practical and aesthetic, and with a single unit, this product allows you to efficiently connect all your dryer exits, stove hoods and bathroom exits through a single opening. The OPTI-ViM112 model is designed for flat roofs and provides space to hold the roof membrane around the base. This concept allows for better sealing of the aperture made for the location of the unit on the roof. It's the efficient way to fit all your ventilation ducts through a single opening.



Advantages

- Easy-to-maintain removable grid
- Designed to prevent infiltration
- Specially insulated model for flat roofs

Colours

Standard colours available: brown, grey, black and white. Other colours available on special order (additional fee).

Norms


In compliance with CSA
The National Building Code requires adequate ventilation of the roof as per the minimum standard of Section 9.19.1 or according to the ACNOR CAN3-A93-M82.

Use

This design thrusts air away from the roof surface, preventing ice formation and build up. Each exit is connected independently. Each exhaust has an internal escape hatch that prevents excessive air flow and heat loss. The OPTI-VENT is the ideal alternative to wall vent problems that often cause hot and moist air to return through the soffit to the roof. Ensure proper positioning, i.e. 8" from the ridge, to provide sufficient clearance to promote air expulsion and prevent snow accumulation. Available for fittings up to 10 inches (25.4 cm). Several evacuators are possible in a single unit of OPTI-VENT.

Characteristics

The vent is manufactured from galvanized steel followed by a specialized baked paint finish.

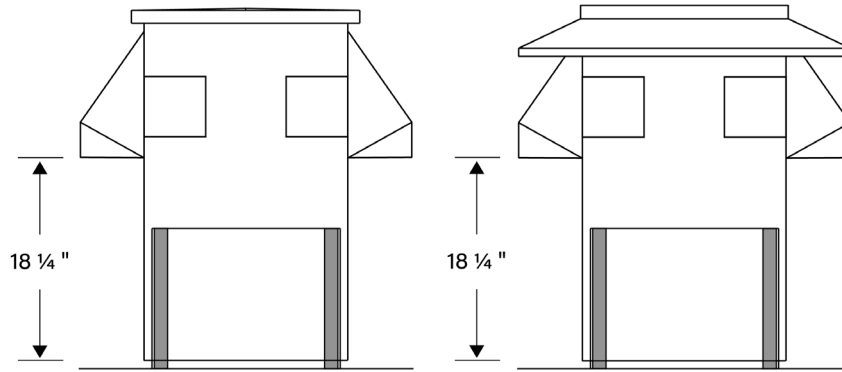

OPTI-ViM012

OPTI-ViM112

MODEL	PRODUCT	EXHAUST		SPECIFICATIONS
		FRONT	BACK	
Standard	OPTI-ViM012 1s4	10,1 cm • 4"		Galvanized steel 26 gauge, insulated base with one 4" exhaust
Deluxe	OPTI-ViM112 1s4			
Standard	OPTI-ViM012 2s4	10,1 cm • 4"	10,1 cm • 4"	Galvanized steel 26 gauge, insulated base with two 4" exhausts
Deluxe	OPTI-ViM112 2s4			
Standard	OPTI-ViM012 1s6	15,2 cm • 6"		Galvanized steel 26 gauge, insulated base with one 6" exhaust
Deluxe	OPTI-ViM112 1s6			
Standard	OPTI-ViM014 1s4 1s6	10,1 cm • 4"	15,2 cm • 6"	Galvanized steel 26 gauge, insulated base with one 4" and one 6" exhaust
Deluxe	OPTI-ViM114 1s4 1s6			

Options

We can manufacture all dimensions on request.

With 7.6 cm (3"), 12.7 cm (5"), 20,3 cm (8"), 25,4 cm (10" round) and 25.4 x 8.2 cm (10" x 3.25 ") openings.

Warranty

The consumer must ensure that this product is appropriate for the intended use. Since the installer's skills and surface conditions are independent of the manufacturer's control, we limit our liability to the replacement of defective equipment only if proof of purchase can be provided. Free on board (FOB factory).