

Adjustable multi-exit insulated vent for sloped roof

OPTI-VA012

Practical and aesthetic, and with a single unit, this product allows you to efficiently connect all your dryer exits, stove hoods and bathroom exits through a single opening. The OPTI-VA012 model is designed with an adjustable base for sloped roofs. It's an efficient way to fit all your ventilation ducts, even on a sloped roof, through a single opening.



Advantages

- Easy-to-maintain removable grid
- Designed to prevent infiltration
- Comes with an adjustable base up to an angle of 18/12

Colours

Standard colours available: brown, grey, black and white. Other colours available on special order (additional fee).

Norms


In compliance with CSA
The National Building Code requires adequate ventilation of the roof as per the minimum standard of Section 9.19.1 or according to the ACNOR CAN3-A93-M82.

Use

This design thrusts air away from the roof surface, preventing ice formation and build up. Each exit is connected independently. Each exhaust has an internal escape hatch that prevents excessive air flow and heat loss. The OPTI-VENT is the ideal alternative to wall vent problems that often cause hot and moist air to return through the soffit to the roof. Ensure proper positioning, i.e. 8" from the ridge, to provide sufficient clearance to promote air expulsion and prevent snow accumulation. Available for fittings up to 10 inches (25.4 cm). Several evacuators are possible in a single unit of OPTI-VENT.

Characteristics

The vent is manufactured from galvanized steel followed by a specialized baked paint finish.

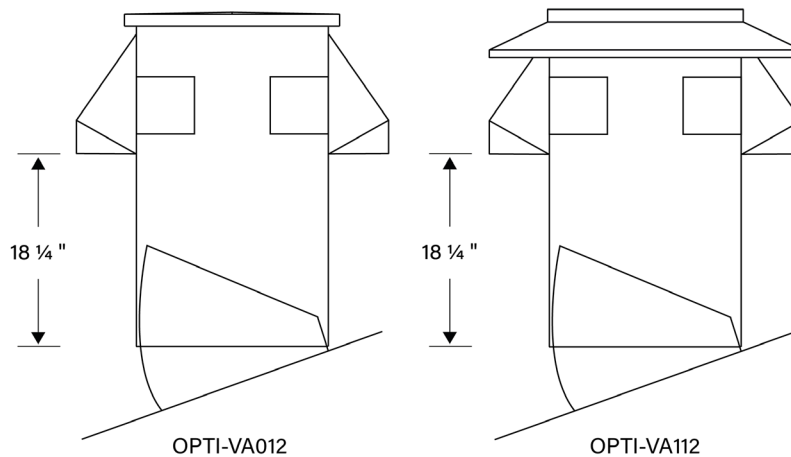

MODEL	PRODUCT	EXHAUST		SPECIFICATIONS
		FRONT	BACK	
Standard	OPTI-VA012 1s4	10,1 cm • 4"		Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with one 4" exhaust.
Deluxe	OPTI-VA112 1s6			
Standard	OPTI-VA012 2s4	10,1 cm • 4"	10,1 cm • 4"	Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with two 4" exhaust.
Deluxe	OPTI-VA112 2s4			
Standard	OPTI-VA012 1s6	15,2 cm • 6"		Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with one 6" exhaust.
Deluxe	OPTI-VA112 1s6			
Standard	OPTI-VA014 1s4 1s6	10,1 cm • 4"	15,2 cm • 6"	Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with one 4" and one 6" exhaust.
Deluxe	OPTI-VA114 1s4 1s6			

Options

We can manufacture all dimensions on request.

With 7.6 cm (3"), 12.7 cm (5"), 20,3 cm (8"), 25,4 cm (10" round) and 25.4 x 8.2 cm (10" x 3.25 ") openings.

Warranty

The consumer must ensure that this product is appropriate for the intended use. Since the installer's skills and surface conditions are independent of the manufacturer's control, we limit our liability to the replacement of defective equipment only if proof of purchase can be provided. Free on board (FOB factory).