

Multi-exits Insulated Vent OPTI-VENT

Practical and aesthetic, this single unit allows you to efficiently connect all your dryer exhausts, range hoods, and bathroom exhaust vents through a single opening. It's an efficient way to manage all your ventilation ductwork, all within a single opening.



Advantages

Easy-to-maintain removable grid
Designed to prevent leaks

OPTI-VA: Designed for sloped roofs with an adjustable base up to an 18/12 angle

OPTI-ViM: Designed for flat roofs, insulated base providing the necessary space for membrane adhesion

OPTI-VP: 45° base designed for flat roofs with an existing wooden base

OPTI-VR: Model without a base, for use with an existing base

Colours

Standard colours available: brown, grey, black and white. Other colours available on special order (additional fee).

Norms

In compliance with CSA


The National Building Code requires adequate ventilation of the roof as per the minimum standard of Section 9.19.1 or according to the ACNOR CAN3-A93-M82.

Use

This design thrusts air away from the roof surface, preventing ice formation and build up. Each exit is connected independently. Each exhaust has an internal escape hatch that prevents excessive air flow and heat loss. The OPTI-VENT is the ideal alternative to wall vent problems that often cause hot and moist air to return through the soffit to the roof. Ensure proper positioning, i.e. 8" from the ridge, to provide sufficient clearance to promote air expulsion and prevent snow accumulation. Available for fittings up to 10 inches (25.4 cm). Several evacuators are possible in a single unit of OPTI-VENT.

Characteristics

The vent is manufactured from galvanized steel followed by a specialized baked paint finish.

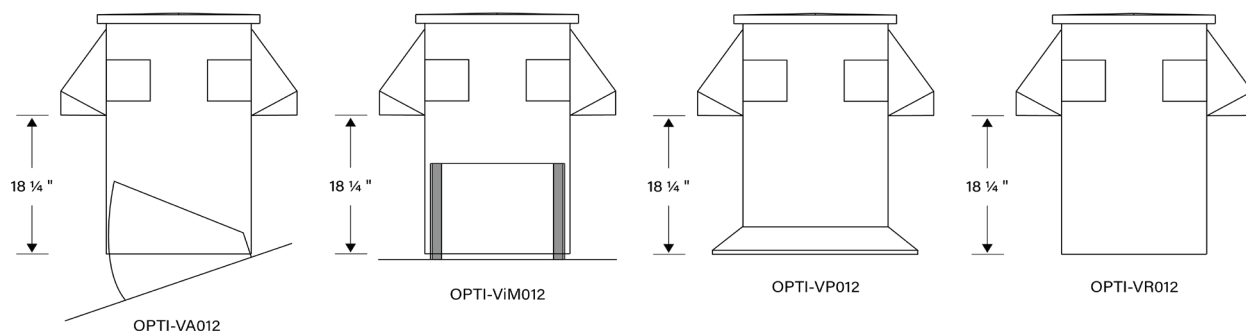

PRODUCT	EXHAUST		SPECIFICATIONS
	FRONT	BACK	
OPTI-VA012 1s4	10,1 cm • 4"		Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with one 4" exhaust
OPTI-VA012 2s4	10,1 cm • 4"	10,1 cm • 4"	Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with two 4" exhausts
OPTI-VA012 1s6	15,2 cm • 6"		Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with one 6" exhaust
OPTI-VA014 1s4 1s6	10,1 cm • 4"	15,2 cm • 6"	Galvanized steel 26 gauge, for sloped roof between 2/12 to 18/12 with one 4" and one 6" exhaust
OPTI-ViM012 1s4	10,1 cm • 4"		Galvanized steel 26 gauge, insulated base suitable for membranes with one 4" exhaust
OPTI-ViM012 2s4	10,1 cm • 4"	10,1 cm • 4"	Galvanized steel 26 gauge, insulated base suitable for membranes with two 4" exhausts
OPTI-ViM012 1s6	15,2 cm • 6"		Galvanized steel 26 gauge, insulated base suitable for membranes with one 6" exhaust
OPTI-ViM014 1s4 1s6	10,1 cm • 4"	15,2 cm • 6"	Galvanized steel 26 gauge, insulated base suitable for membranes with one 4" and one 6" exhaust
OPTI-VP012 1s4	10,1 cm • 4"		Galvanized steel 26 gauge, 45° base for flat roofs with one 4" exhaust
OPTI-VP012 2s4	10,1 cm • 4"	10,1 cm • 4"	Galvanized steel 26 gauge, 45° base for flat roofs with two 4" exhausts
OPTI-VP012 1s6	15,2 cm • 6"		Galvanized steel 26 gauge, 45° base for flat roofs with one 6" exhaust
OPTI-VP014 1s4 1s6	10,1 cm • 4"	15,2 cm • 6"	Galvanized steel 26 gauge, 45° base for flat roofs with one 4" and one 6" exhaust
OPTI-VR012 1s4	10,1 cm • 4"		Galvanized steel 26 gauge, for existing base with one 4" exhaust
OPTI-VR012 2s4	10,1 cm • 4"	10,1 cm • 4"	Galvanized steel 26 gauge, for existing base with two 4" exhaust
OPTI-VR012 1s6	15,2 cm • 6"		Galvanized steel 26 gauge, for existing base with one 6" exhaust
OPTI-VR014 1s4 1s6	10,1 cm • 4"	15,2 cm • 6"	Galvanized steel 26 gauge, for existing base with one 4" and one 6" exhaust

Options

The options shown in the table above are the standard models. These models are also available in a deluxe version, with an added deflector (112).

We can manufacture all dimensions on request.

With 7.6 cm (3"), 12.7 cm (5"), 20,3 cm (8"), 25,4 cm (10" round) and 25.4 x 8.2 cm (10" x 3.25 ") openings.

Warranty

The consumer must ensure that this product is appropriate for the intended use. Since the installer's skills and surface conditions are independent of the manufacturer's control, we limit our liability to the replacement of defective equipment only if proof of purchase can be provided. Free on board (FOB factory).