

Flat roof cabanon with 45° base OPTI-CA

The Cabanon protects the pieces of equipment installed on the roof from the elements while allowing the entry or evacuation of air. Architects and engineers recommend this product to exhaust excess heat from boiler rooms or to restore air pressure in elevator shafts.



Advantages

- Simple to install
- Anti-gust deflector
- No maintenance and noise free

Colours

Standard colours available: brown, grey, black, white and charcoal. Other colours available on special order (additional fee).

Norms


In compliance with CSA
The National Building Code requires adequate ventilation of the roof as per the minimum standard of Section 9.19.1 or according to the ACNOR CAN3-A93-M82.

Use

The Cabanon is used for the removal of excessive heat, massive steam and exhaust fumes from appliances or equipment installed in the building.

Characteristics

The vent is manufactured from galvanized steel followed by a specialized baked paint finish.

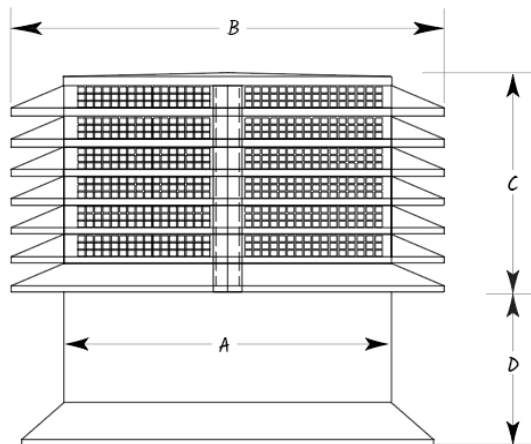

PRODUCT	DIMENSIONS				EVACUATION	NUMBER OF DEFLECTORS	STEEL GAUGE USED
	A	B	C	D			
OPTI-CA26	66 cm • 26"	85 cm • 33,5"	45,7 cm • 18"	53,3 cm • 21"	62,8 m ² • 676 in. ²	7	24 & 26
OPTI-CA28	71,1 cm • 28"	90,1 cm • 35,5"	52 cm • 20,5"	53,3 cm • 21"	72,8 m ² • 784 in. ²	8	24 & 26
OPTI-CA30	76,2 cm • 30"	95,2 cm • 37,5"	52 cm • 20,5"	53,3 cm • 21"	83,6 m ² • 900 in. ²	8	24 & 26
OPTI-CA32	81,2 cm • 32"	100,3 cm • 39,5"	58,4 cm • 23"	53,3 cm • 21"	95,1 m ² • 1024 in. ²	9	24 & 26
OPTI-CA34	86,3 cm • 34"	105,4 cm • 41,5"	58,4 cm • 23"	53,3 cm • 21"	107,3 m ² • 1156 in. ²	9	24 & 26
OPTI-CA36	91,4 cm • 36"	110,4 cm • 43,5"	64,7 cm • 25,5"	53,3 cm • 21"	120,4 m ² • 1296 in. ²	10	24 & 26
OPTI-CA38	96,5 cm • 38"	115,5 cm • 45,5"	64,7 cm • 25,5"	53,3 cm • 21"	134,1 m ² • 1444 in. ²	10	24 & 26
OPTI-CA40	101,6 cm • 40"	120,6 cm • 47,5"	71,1 cm • 28"	53,3 cm • 21"	148,6 m ² • 1600 in. ²	11	24 & 26
OPTI-CA42	106,6 cm • 42"	125,7 cm • 49,5"	71,1 cm • 28"	53,3 cm • 21"	163,8 m ² • 1764 in. ²	11	24 & 26
OPTI-CA44	111,7 cm • 44"	130,8 cm • 51,5"	77,4 cm • 30,5"	53,3 cm • 21"	179,8 m ² • 1936 in. ²	12	24 & 26
OPTI-CA46	116,8 cm • 46"	135,8 cm • 53,5"	77,4 cm • 30,5"	53,3 cm • 21"	196,5 m ² • 2116 in. ²	12	24 & 26

Custom model

These products are available by special order only.

Warranty

The consumer must ensure that this product is appropriate for the intended use. Since the installer's skills and surface conditions are independent of the manufacturer's control, we limit our liability to the replacement of defective equipment only if proof of purchase can be provided. Free on board (FOB factory).