

Adjustable 3 wings roof attic ventilator for sloped roof OPTI-A308

The aesthetic of the OPTI-A308 offers all the advantages of a regular vent. It is the smallest functional vent on the market. With 3 wings with an 8" opening, it adjusts to all roof slopes up to 18/12. This 3-fin design blends perfectly with the other fans already in place on your property. Due to its adapted design, it enhances the appearance and beautifies the glance by adapting to the framing of a shed or a smaller building. Openings shaped from the structure of the vent, eliminate any need for long-term maintenance and prevent the intrusion of birds or rodents inward. This vent gives the advantage of a cooler attic in the summer months and drier during the winter. It thus extends the integrity of the structure. It promotes a higher aspiration and, with the help of the wind, produces a chimney effect. The air from the attic is continuously exchanged at a frequency of 100 cfm, ventilating up to an area of 500 sq.ft.



Advantages

- Optimizes and evenly tempers attic ventilation
- Facilitates the evacuation of heat and condensation
- Preserves the integrity of attic materials
- Easy to adjust on a slope from 2/12 to 18/12
- Easy to install by only one person
- Screws included
- Anti-gust deflector
- No maintenance and noise free
- Integrated gutter

Colours

Standard colours available: brown, grey, black and charcoal. Other colours available on special order (additional fee).

Norms


CSA Certified
The National Building Code requires adequate ventilation of the roof as per the minimum standard of Section 9.19.1 or according to the ACNOR CAN3-A93-M82.

Use

Ventilation is required by the Canadian Building Code. A good ventilation means keeping the attic space near the outside temperature to avoid excessive contrasts. With the help of soffits, for example In summer, the chimney effect created by the Optimum ventilator eliminates excess heat from the attic and thus helps maintain the integrity of the asphalt shingles. In winter, you will get a drier attic. No matter what the season, Optimum Ventilators will help to optimize the comfort of your home!

Characteristics

The vent is manufactured from galvanized steel followed by a specialized baked paint finish.

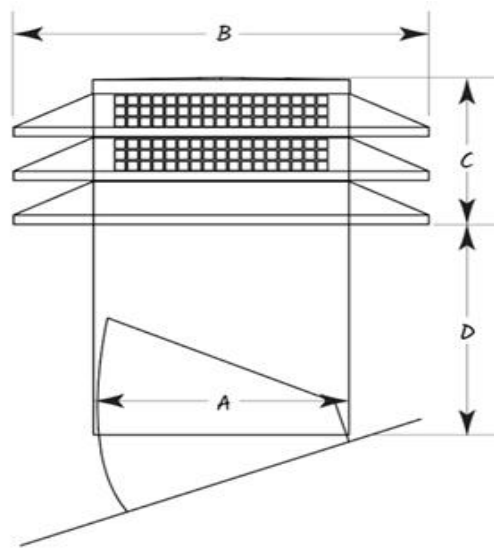

PRODUCT	DIMENSIONS				EVACUATION	NUMBER OF DEFLECTORS	STEEL GAUGE USED
	A	B	C	D			
OPTI-A308	20 cm • 8"	37,5 cm • 14,75"	19,5 cm • 7,6"	21,5 cm • 8,5"	0,04 m ² • 64 in. ²	3	24 & 26

Custom model

Custom models are available as special order. *We can manufacture any other size on request.

Options

This model is available with or without filter. If you have a ventilator with a filter, you must install a water collecting tray. At all times, it is strongly recommended to install a water collecting tray (OPTI-PAN) under your ventilator, it is the solution for a dry attic.

Warranty

The consumer must ensure that this product is appropriate for the intended use. Since the installer's skills and surface conditions are independent of the manufacturer's control, we limit our liability to the replacement of defective equipment only if proof of purchase can be provided. Free on board (FOB factory).