

## 1 wing roof ventilator for flat roof with 45° base OPTI-P112

The OPTI-P112 ventilator is designed for flat roofs. With a base at 45° to go on a wooden base or other support. The design and openings provide optimal ventilation of the attic. The ventilation power of this vent depends on several factors including space in the attic as well as soffit being present. Under ideal conditions this vent has the capacity to ventilate from 100 to 150 sq. ft. It is always recommended to place a retention tray on the insulation under the ventilator.



### Advantages

- Optimizes and evenly regulates the ventilation of the attic
- Facilitates the evacuation of heat and condensation
- Preserves the integrity of the attic materials
- Simple to install
- Anti-gust deflector
- No maintenance and noise free

### Colours

Standard colours available: brown, grey, black and white. Other colours available on special order (additional fee).

### Norms


CSA Certified  
The National Building Code requires adequate ventilation of the roof as per the minimum standard of Section 9.19.1 or according to the ACNOR CAN3-A93-M82.

### Use

Ventilation is required by the Canadian Building Code. A good ventilation means keeping the attic space near the outside temperature to avoid excessive contrasts. With the help of soffits, for example In summer, the chimney effect created by the Optimum ventilator eliminates excess heat from the attic and thus helps maintain the integrity of the asphalt shingles. In winter, you will get a drier attic. No matter what the season, Optimum Ventilators will help to optimize the comfort of your home!

### Characteristics

The vent is manufactured from galvanized steel followed by a specialized baked paint finish.

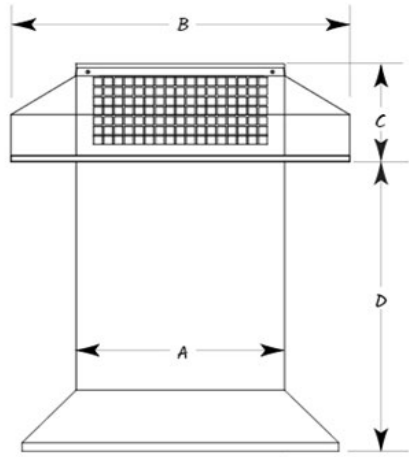

PRODUCT	DIMENSIONS				EVACUATION	NUMBER OF DEFLECTORS	STEEL GAUGE USED
	A	B	C	D			
OPTI-P112	29,9 cm • 11,8"	49,5 cm • 19,5"	13,9 cm • 5,5"	42,5 cm • 16,75"	0,06 m <sup>2</sup> • 99 in. <sup>2</sup>	1	24 & 26
OPTI-P114	35 cm • 13,8"	60,9 cm • 24"	13,9 cm • 5,5"	46,6 cm • 18,37"	0,07 m <sup>2</sup> • 121,5 in. <sup>2</sup>	1	24 & 26
OPTI-P116	40,1 cm • 15,8"	66 cm • 26"	13,9 cm • 5,5"	54,9 cm • 21,62"	0,09 m <sup>2</sup> • 139,5 in. <sup>2</sup>	1	24 & 26
OPTI-P118	45,2 cm • 17,8"	71,1 cm • 28"	13,9 cm • 5,5"	55,2 cm • 21,75"	0,10 m <sup>2</sup> • 157,5 in. <sup>2</sup>	1	24 & 26
OPTI-P120	50,2 cm • 19,8"	81,2 cm • 32"	20,3 cm • 8"	52,7 cm • 20,75"	0,16 m <sup>2</sup> • 263,25 in. <sup>2</sup>	1	24 & 26
OPTI-P122	55,3 cm • 21,8"	86,3 cm • 34"	20,3 cm • 8"	52,7 cm • 20,75"	0,18 m <sup>2</sup> • 290,25 in. <sup>2</sup>	1	24 & 26
OPTI-P124	60,4 cm • 23,8"	91,4 cm • 36"	20,3 cm • 8"	52,7 cm • 20,75"	0,20 m <sup>2</sup> • 317,25 in. <sup>2</sup>	1	24 & 26

### Custom model

Custom models are available as special order. \*We can manufacture any other size on request.

### Options

This model is available with or without a filter.

For a ventilator with a filter, we recommend installing a water collection tray (OPTI-PAN).

### Important Note:

It is mandatory to use an Opti-Pan containment tray for the installation of all ventilators installed using the passive method, without air intake from the wall or soffit, at all times.

### Warranty

The consumer must ensure that this product is appropriate for the intended use. Since the installer's skills and surface conditions are independent of the manufacturer's control, we limit our liability to the replacement of defective equipment only if proof of purchase can be provided. Free on board (FOB factory).